



Thank you for choosing the PoleStar™ PM-Band-20S Kit. This all weather, stainless steel banding strap is designed to attach the PoleStar™ Pole Adapters to 2" to 6" diameter poles.

Note to installers

Due to the wide variety of wall structures, materials and mounting methods, the installing contractor must exercise proper judgment in selecting the mounting area and hardware.

As a guide, the installation, when complete should be capable of supporting 5 times the actual applied load. Always use a back up safety system such as a safety cable.

To assure a trouble free installation, read through and follow these instructions carefully before beginning. If you have doubts about the integrity of the structure you are mounting to or you are not sure about the proper hardware to use, consult a structural and/or hardware specialist.

Follow these instructions for the most efficient and safest mounting results.

2 pcs PM-BAND-20S Housing w/ banding strap

1 pc Instruction sheet

Do not exceed the working load limit of 150 lbs/68 kg. / pair

Recommended Screw Torque = 30-35 In/lb (3.4-4.0 N.m)

Step 1: Insert the end of the band through the slots of the PM-MOUNT-6DOWN (or PM-MOUNT-6DOWN-G or PM-SAFETY-6DOWN) and out on the other side. Wrap the banding strap snugly around the pole until the end reaches the band's housing (*Figure 1*).

Step 2: Insert the end of the banding strap into the housing's opening then rotate the screw clockwise using a screw driver or a socket wrench to tighten the band around the pole (*Figure 2*). Do not fully tighten.

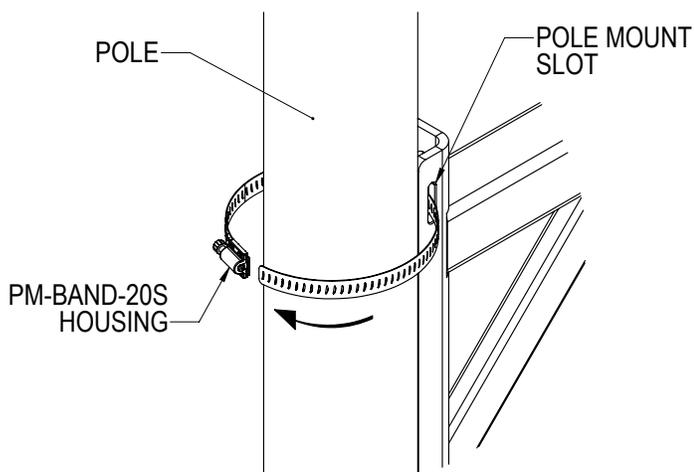


Figure 1

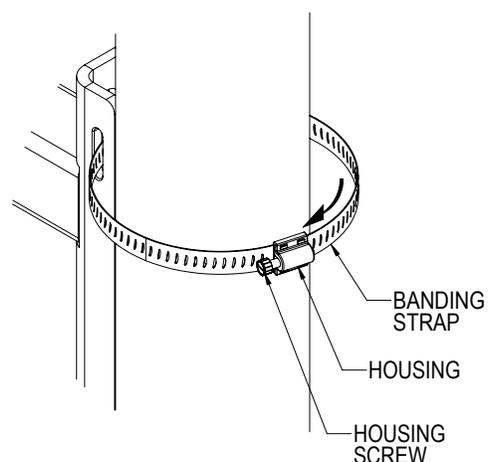


Figure 2

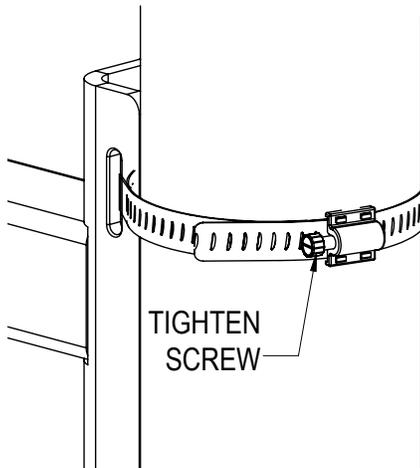


Figure 3

Step 3: Position the location of the PM-MOUNT-6DOWN on the pole and then fully tighten screw using screw driver or a wrench to desired tension and complete the banding operation. Recommended torque is 30-40 in/lb (*Figure 3*).

Step 4: Repeat steps 1 to 3 for the lower banding strap assembly (*Figure 4*).

Step 5: Install Safety Cable

Always use a safety cable from the speaker to a structurally safe anchor point (Refer to PM-SAFETY-6DOWN for Safety Cable Anchor Point System).

Note: Optional

To strengthen banding strap use two straps on each slot of the PM-MOUNT-6DOWN.

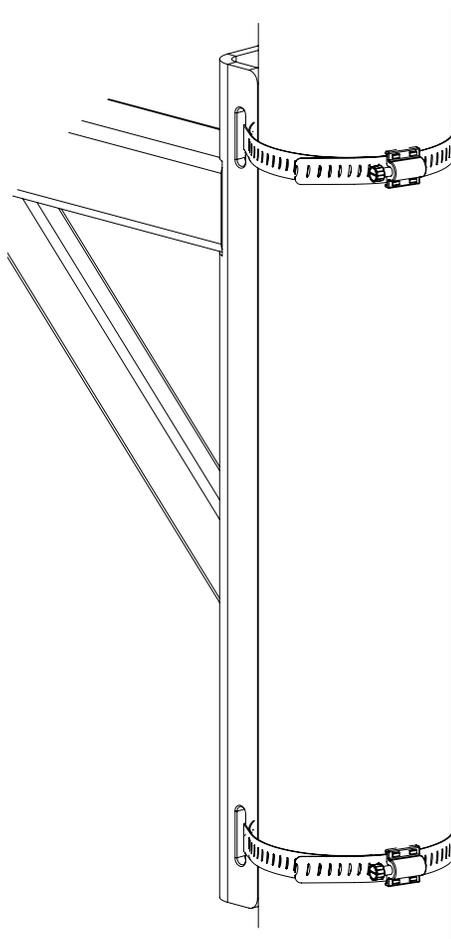


Figure 4