



Swivel Hang Point

CHANNEL STYLE BEAM CLAMP

Adaptive's low-profile channel style beam clamps anchor permanently to structural I-Beams and provide a safe, predictable method for suspending loads from overhead.

The channel style beam clamp is adjustable for beam flange widths ranging from between 7" and 12" (178-305 mm). The body of the clamp mounts flush underneath the beam's flange and is equipped with a load-rated swiveling shoulder eye bolt that rotates in the direction of the load to minimize side loading.

Specify this beam clamp for many types of suspensions from horizontally oriented I-Beams, including wire rope assemblies, bridles, rigging chain and other equipment.

A variety of spacers are included in the kits to accommodate beam flange thickness from .1875 to 1.0" (5mm to 25mm) and the only tools that are needed to install the clamp is a 1.0" and a 7/16" hex wrench.



* Steel I-Beams Only

Wood Beam Adapter
BC-LAM-KIT**KEY FEATURES:**

- Single load-rated center hang point
- Provides safe load-rated hang point to 45° off center.
- Secures to beam flanges ranging from 7" - 12"

OPTIONAL ACCESSORIES:

- See Wire Rope Datasheets
- See Rigging components Datasheets
- BC-LAM-KIT for wooden beams

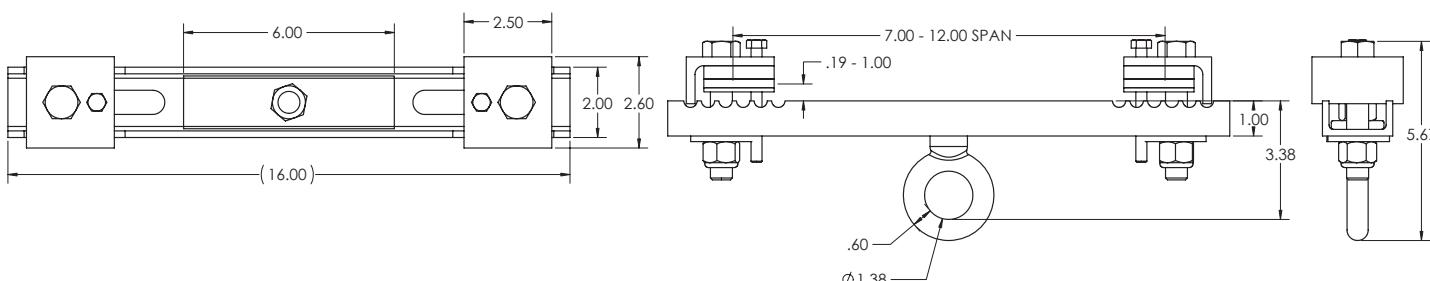
* Not for human suspension

SPECIFICATIONS:

- Materials:** All Steel Components
Width: (BC7-12) 7" to 12" / 178mm to 305mm
Finish: Powder Coat
Color: Black
WLL: 1600 lb / 725.7478 kg (VERTICAL) metal I-Beams
45 DEG. WL: 1280 lb / 580.5982 kg
WLL: 300lb / 136 kg max on wooden beams
Design Factor: 5:1
DO NOT EXCEED 45° off hang points
Weight: 8.8 lb / 4 kg

PACKAGE CONTENTS:

- 1 pc Beam Clamp Channel
- 2 pcs Locking Angle Plate
- 2 pcs Flat Washer, 5/8"
- 2 pcs Nyloc Nut, 5/8-11

**ALWAYS INSTALL SAFETY CABLES**

WARNING: Mounting and/or suspension of equipment requires experienced professionals. Improperly installed equipment can result in property damage, personal injury and/or liability to the installing contractor.