

# BOSE-LTIII-RBRA

## LT Series LTIII REAR BRACKET Installation Instructions

The BOSE-LTIII-RBRA is a rear bracket adapter to provide a single pull back point for the Bose LT Series loudspeakers. The bracket is equipped with a pull back tail with a hole for a 1/4" to 3/8" shackle.

**Important:** Rigging overhead system requires professional experience. **Improperly installed equipment can result in property damage, personal injury, death and/or liability to the installing contractor.** Do not suspend if in doubt about the integrity of the structure.

**Caution:** Due to the wide variety of structures, environments, materials and rigging methods, the installing contractor should exercise good judgment in selecting the proper mounting area and hardware.

**Follow these instructions for the most efficient and safest mounting results.**

### Package Contents:

- 1 pc. BOSE-LTIII-RBRA bracket
- 1 pc. Instruction sheet, 8.5x11
- 2 pcs. Hex bolt, 3/8-16X1.5, G8, blk
- 2 pcs. Split washer, 3/8"



### Step 1.

For pull back, attach the rear bracket to the bottom rear of the speaker using two 3/8-16x1.5 hex bolts and 3/8 split washers (Figure 1)

### Step 2.

Attach a load rated pull back cable or chains using load rated shackles to the tail of the bracket (Figure 2).

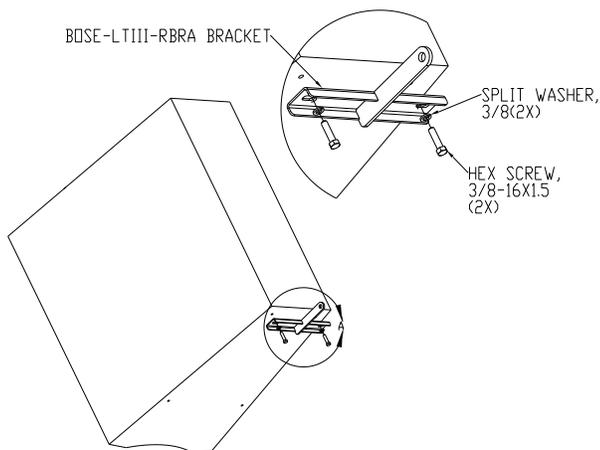


Figure 1

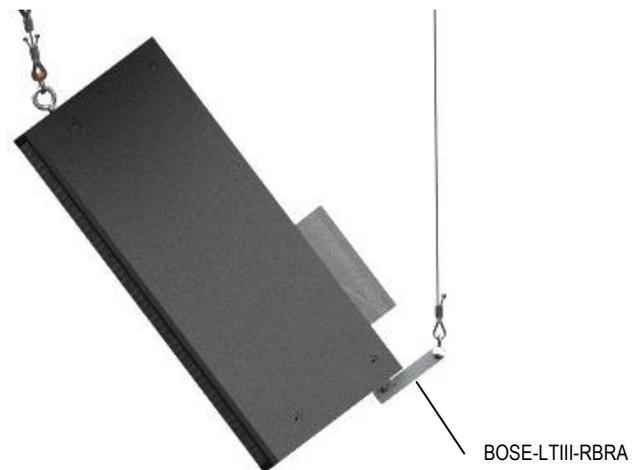


Figure 2