

Installation Instructions

LTMB24-ROD-KT

LT MB24 CONNECTING RODS

Thank you for choosing the LTMB24-ROD-KT Threaded Rods. The LTMB24-ROD-KT kit connects a second tier to two, three, or four wide BOSE LTIII MB24 speakers.

Important:

Rigging overhead system requires professional experience. **Improperly installed equipment can result in property damage, personal injury, death and/or liability to the installing contractor.** Do not suspend if in doubt about the integrity of the structure.

Caution: Due to the wide variety of structures, environments, materials and rigging methods, the installing contractor must exercise good judgment in selecting the proper mounting area and hardware.

Follow these instructions for the most efficient and safest rigging results. Do not exceed the working load limit of 1000 lbs/455 Kg.

Package Contents:

4 pcs. 1/2-13X31.5" Threaded Rod
1 pc. Instruction sheet, 8.5X11
16 pcs Jam nuts, 1/2-13,G8, blk
8 pcs. Flat washer, 1/2", SAE

Step 1: Use on LTMB24-X2-RK

Securely join the top and bottom tier by bolting the frames together using a 1/2" threaded rod, flat washers and jam nuts. Insert the threaded rods into the four corner holes of the top frame and into the bottom frame. Apply lock-tite liquid solution on the nuts then secure both ends of the threaded rods with two flat washers and four jam nuts (two jam nuts per end). Tighten nuts permanently until frame and loudspeakers are tightly secured (Figure 1 and 2).

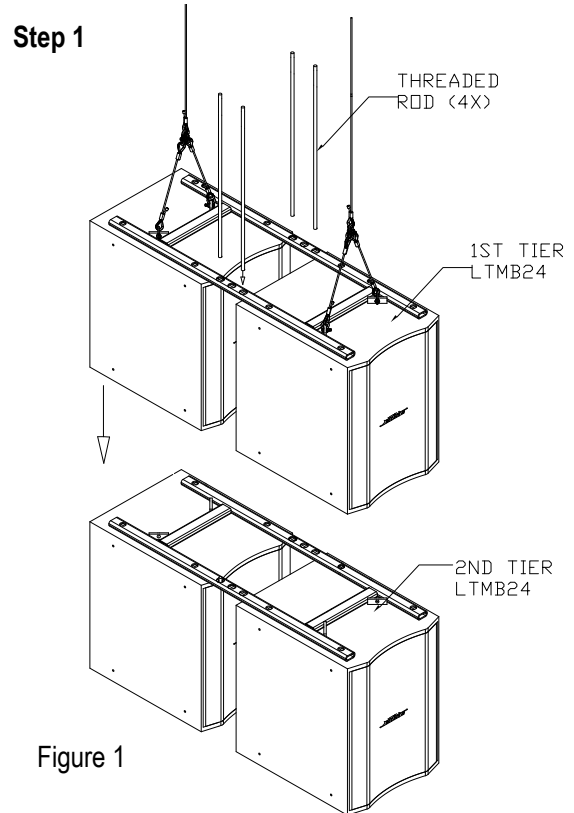


Figure 1

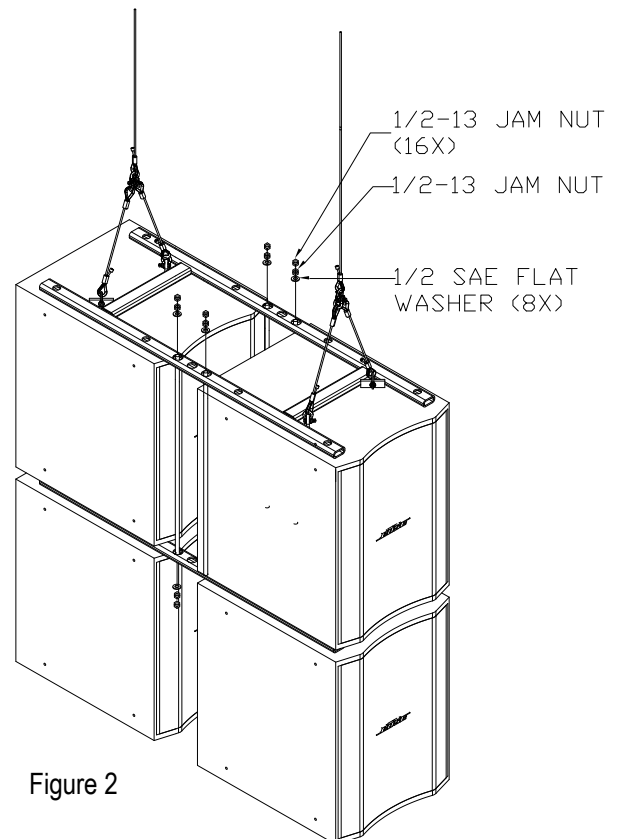


Figure 2

Step 2: Use on LTMB24-X3-RK

Securely join the top and bottom tier by bolting the frames together using a 1/2" threaded rod, flat washers and jam nuts. Insert the threaded rods into the holes shown on Figure 3 and 4 of the top frame and into the bottom frame. Apply lock-tite liquid solution on the nuts then secure both ends of the threaded rods with two flat washers and four jam nuts (two jam nuts per end). Tighten nuts permanently until frame and loudspeakers are tightly secured (Figure 3 and 4).

Step 2

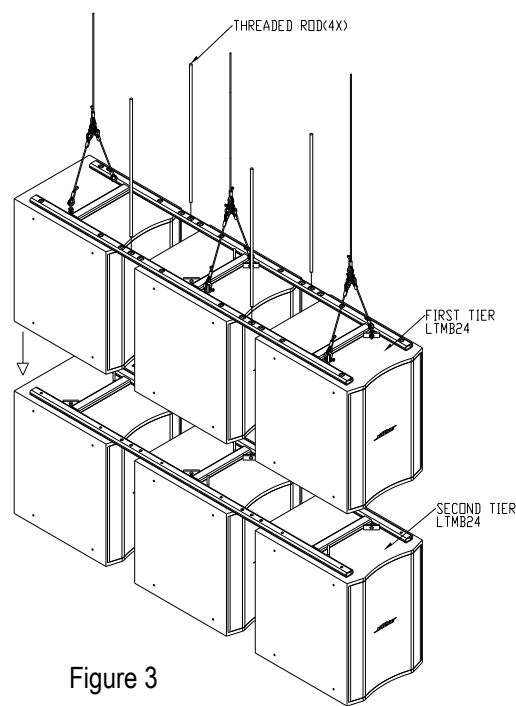


Figure 3

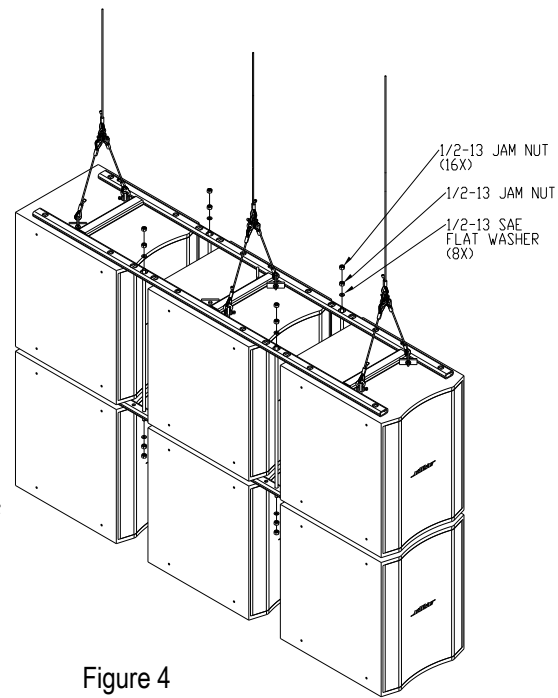


Figure 4

Step 3: Use on LTMB24-X4-RK(Two Kits)

Securely join the top and bottom tier by bolting the frames together using a 1/2" threaded rod, flat washers and jam nuts. Insert the threaded rod into the center holes for the outer edge connectors and use the four corner holes or the center of the frame for the center connectors. Apply lock-tite liquid solution on the nuts then secure both ends of the threaded rods with two flat washers and four jam nuts (two jam nuts per end). Tighten nuts permanently until frame and loudspeakers are tightly secured (Figure 5 and 6).

Step 3

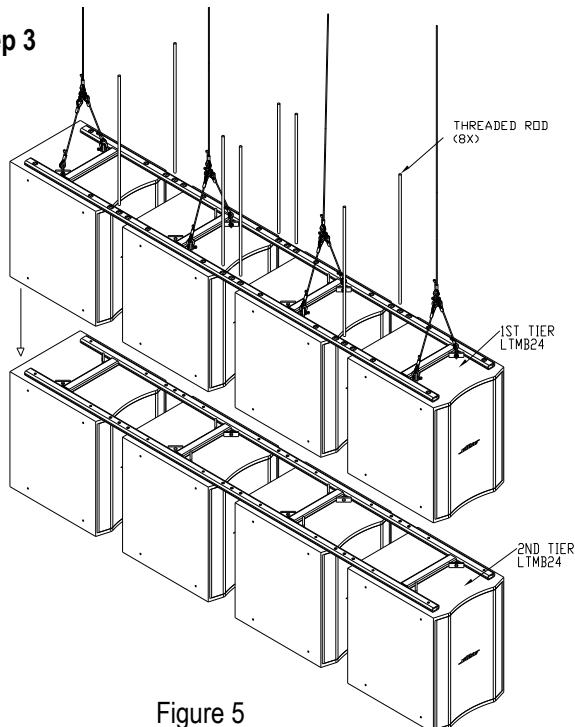


Figure 5

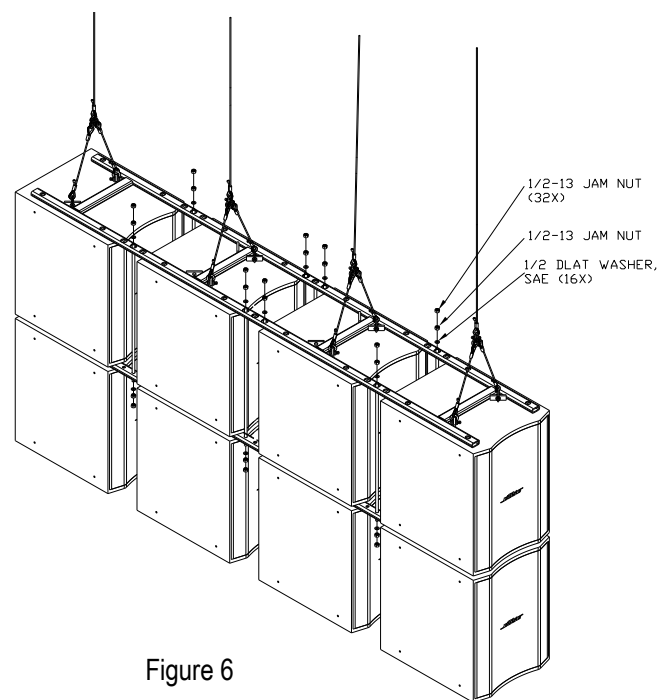


Figure 6