

The OSRV1-3/8" offset swivel ring fitting mounts to flat surfaces, such as wood, steel and concrete. Secure with grade 8 fasteners (or equivalent) to their proper torque value. One 2" long 3/8 hex bolt is included for use with loudspeaker cabinets. M10X50mm hex bolts may be ordered separately.

When the OSRV fitting is mounted to softer surfaces such as wood and plastic, the torque values for fasteners will vary so be sure to take this and the materials strength into consideration during installation.

When installed properly, this fitting does not require a lock washer; however a thread lock adhesive should be used for permanent installations, especially when mounted to soft materials such as wood and plastic.

Contents:


Be sure that all of the following items are included in this kit before proceeding:

1 pc - Off-Set Swivel Anchor

1pc - 3/8-16x2

Use and Working Load Limit

The OSRV1-3/8" is a load rated structural attach point that will accommodate a suspension or tension load from any angle, relative to the OSRV fitting, due to the swiveling and tilting rotations of the fitting's pull ring.

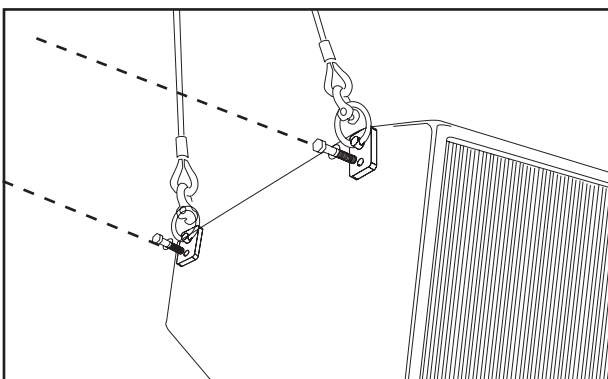

Working Load Limits for the OSRV1-3/8" are;

