

SAS-066-RB

305 lb. WLL


66" TUBULAR STEEL RIGGING BEAM

GridLink®



Rigging Beam with Lifting Points

Use this rigging beam as one of several components to build a load-rated rigging grid assembly. Choose from several pre-engineered rigging beams, joiners and suspension options that allow you to design and assemble your own grid in dozens of different configurations (see GridLink data sheet). This rigging beam may also serve as a spreader bar to suspend objects between two trusses.



Assembled View

STANDARD FEATURES:

- ▶ Use as a spreader bar
- ▶ Compatible with GridLink Rigging System
- ▶ Comes with suspension hardware

OPTIONAL ACCESSORIES

- ▶ See SAS-GL Connector datasheet
- ▶ See SAS-GLT T-Connector datasheet
- ▶ See SAS-100-CA Cross Arm datasheet
- ▶ See SAS-EB-KT Eyebolt suspension datasheet
- ▶ See Steerables® Tilt Cable datasheet
- ▶ See SAS-XXX-RB Rigging Beam Selections

SPECIFICATIONS:

Materials: Structural Steel Alloy
Finish: Powder Coat
Color: Black
WLL: 305 lb. / 139 Kg
Safety Factor: 5:1
Product Weight: 25.8 lb / 11.7 Kg

PACKAGE CONTENTS:

1pc 66" Rigging Beam
2 pcs 1/2" X 5.5" Eye Bolts
2 pcs 1/2" Eye Nuts
2 pcs Black End Caps




MADE IN USA



Rated for indoor use.

DIMENSIONS:

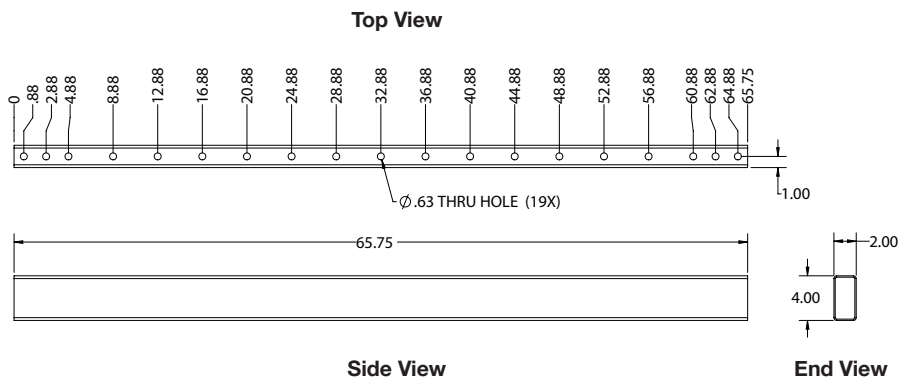

Adaptive Technologies Group
1635 E. Burnett Street | Signal Hill, CA 90755 USA
Ph: 562.424.1100 | Fax: 562.424.3520
www.adaptivetechgroup.com



ALWAYS INSTALL SAFETY CABLES

WARNING: Mounting and/or suspension of audio and video equipment requires experienced professionals. Improperly installed loudspeakers can result in property damage, personal injury and/or liability to the installing contractor.