SAS-086-RB

233 lb. WLL

86” TUBULAR STEEL RIGGING BEAM

GridLink®

Rigging Beam with Lifiting Points

Use this rigging beam as one of several components to build a load-rated rigging grid assembly. Choose from several pre-engineered rigging beams, joiners and suspension options that allow you to design and assemble your own grid in dozens of different configurations (see GridLink data sheet). This rigging beam may also serve as a spreader bar to suspend objects between two trusses.

Assembled View

STANDARD FEATURES:

- Use as a spreader bar
- Compatible with GridLink Rigging System
- Comes with suspension hardware

OPTIONAL ACCESSORIES

- See SAS-GL Connector datasheet
- See SAS-GLT T-Connector datasheet
- See SAS-100-CA Cross Arm datasheet
- See SAS-EB-KT Eyebolt suspension datasheet
- See Steerables® Tilt Cable datasheet
- See SAS-XXX-RB Rigging Beam Selections

SPECIFICATIONS:

Materials: Structural Steel Alloy
Finish: Powder Coat
Color: Flat Black
WLL: 233 lb. / 106 Kg
Safety Factor: 5:1
Product Weight: 33.7 lb / 15.3 Kg

PACKAGE CONTENTS:

1pc 86” Rigging Beam
2 pcs 1/2” X 5.5” Eye Bolts
2 pcs 1/2” Eye Nuts
2 pcs Black End Caps

MATES WITH:

SK-375, SK-500, QL-500

MADE IN USA

Rated for indoor use.

DIMENSIONS:

Top View

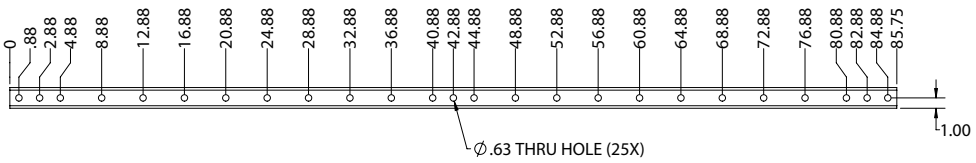

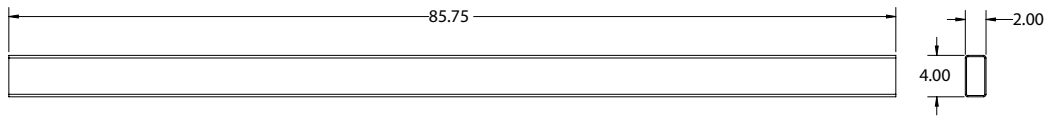

Side View

End View

Adaptive Technologies Group
1635 E. Burnett Street | Signal Hill, CA 90755 USA
Ph: 562.424.1100 | Fax: 562.424.3520
www.adaptivetechnologiesgroup.com

ADAPTIVE TECHNOLOGIES GROUP

ALWAYS INSTALL SAFETY CABLES

WARNING: Mounting and/or suspension of audio and video equipment requires experienced professionals. Improperly installed loudspeakers can result in property damage, personal injury and/or liability to the installing contractor.