

SC-188-24-SS

3/16" DIAMETER 7X19 GAC

WIRE ROPES



Install overhead objects safely using these load-rated wire rope assemblies. There are two varieties to consider.

The silver colored wire rope assemblies are produced using galvanized 7X19 wire rope trimmed to an exacting length and assembled with galvanized thimbles and swages.

The black colored wire rope assemblies are produced from stainless 7X19 wire rope so as to accept the black pigment and trimmed to an exacting length, assembled with black-zinc plated thimbles and swages.

STANDARD FEATURES:

- ▶ Domestically produced
- ▶ Choice of black or silver

OPTIONAL ACCESSORIES:

- ▶ See Turnbuckle data sheet
- ▶ See Shackle data sheet
- ▶ See Eye Bolt data sheet

SPECIFICATIONS:

Material: Silver version is steel
Black version is stainless

WLL: Silver is 840 lb / 382 Kg
WLL: Black is 740 lb / 336 Kg

Safety factor: 5:1

*SPA: screw pin anchor

PACKAGED CONTENTS:

1 pc. Wire Rope Assembly

MATES WITH:

[SK-025](#), [SK-315](#), [SK-375](#),
[QL-025](#), [QL-315](#), [QL-375](#)




Rated for outdoor use.

SINGLE WIRE ROPE ASSEMBLIES

Part #	Length in Inches	Material	Color	WLL
3/16X1	12"	STEEL	SILVER	840 lb / 382 Kg
3/16X1-B	12"	STAINLESS	BLACK	740 lb / 336 Kg
3/16X2.5	30"	STEEL	SILVER	840 lb / 382 Kg
3/16X2.5-B	30"	STAINLESS	BLACK	740 lb / 336 Kg
3/16X5	60"	STEEL	SILVER	840 lb / 382 Kg
3/16X5-B	60"	STAINLESS	BLACK	740 lb / 336 Kg
3/16X10	120"	STEEL	SILVER	840 lb / 382 Kg
3/16X10-B	120"	STAINLESS	BLACK	740 lb / 336 Kg
3/16X20	240"	STEEL	SILVER	840 lb / 382 Kg
3/16X20-B	240"	STAINLESS	BLACK	740 lb / 336 Kg

*Custom Lengths Available

DIMENSIONS:

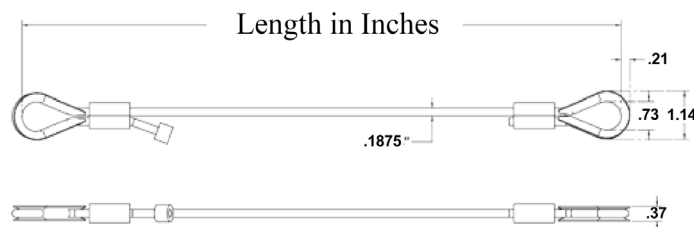

ALWAYS INSTALL SAFETY CABLES

WARNING: Mounting and/or suspension of audio and video equipment requires experienced professionals. Improperly installed loudspeakers can result in property damage, personal injury and/or liability to the installing contractor.

Adaptive Technologies Group

1635 E. Burnett Street | Signal Hill, CA 90755 USA
Ph: 562.424.1100 | Fax: 562.424.3520
www.adaptivetechgroup.com

