MM-060

80 lb. WLL

PAN & TILT BOTTOM & REAR SPEAKER MOUNT

MULTIMOUNT®

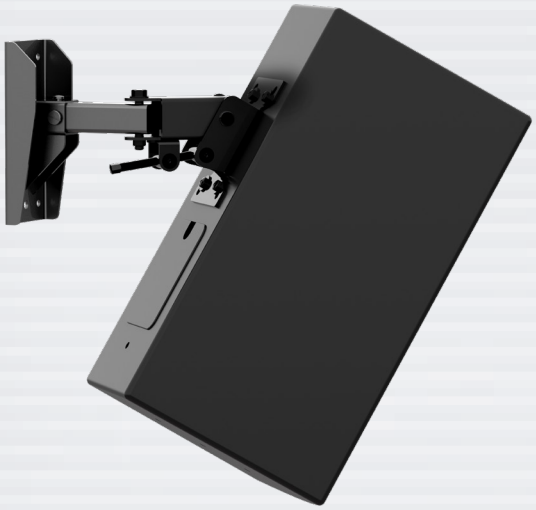

StarGrid®

Attaches to back panels

The MM-060 Speaker Wall Mount attaches to the back and bottom panels of loudspeakers and aims them out and away from walls and other vertical structures. Achieve up to 180 degrees of pan angle adjustments and up to 45 degrees of no-drift down-tilt adjustments by way of its unique screw drive tilt mechanism. This fully adjustable wall mount aims speakers into very precise angles that are required to achieve acoustically accurate immersive audio installations, such as Dolby Atmos and other immersive formats. This mount is solidly constructed with built-in safety features and a load-rating of 5:1 design factor. It's two-step installation sequence saves loads of installation time.

Step 1 Install Wall Plate

Step 2 Attach Mount to Speaker

Step 3 Attach Mount to Wall Plate

Step 4 Aim Speaker

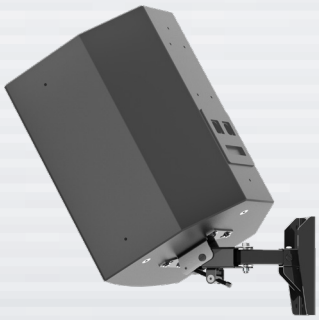

Attaches to bottom panels

STANDARD FEATURES:

- Precise screw-drive tilt adjustments
- Clutch style pan angle locks aims and pivots speakers
- Precise immersive audio adjustments
- Accommodates common speaker mounting patterns
- Easy two-step installation sequence.

OPTIONAL ACCESSORIES:

- WP-16 Wall Stud Adapter
- Safety Cable kits (See SC Series data sheets)
- PM-010 Pole Mount
- See MM-060-EXT-11 (11 inch extension arm)

SPECIFICATIONS:

Material: Structural Steel

Finish: Powder Coat

Color: Black

Tilt Adjustment: 45 degrees

Pan Adjustment: 180 degrees

WLL: 80 lbs. (36.61 Kg) max.

Design Factor: 5:1 ratio

Pack Count: 1 units/carton

PACKAGE CONTENTS:

1 pc Mount Assembly

1 pc Wall Plate

1 pc Hardware Kit

MADE IN USA

Rated for indoor use.

Adaptive Technologies Group
1635 E. Burnett Street | Signal Hill, CA 90755 USA
Ph: 562.424.1100 | Fax: 562.424.3520
www.adaptivetechnologiesgroup.com

ADAPTIVE TECHNOLOGIES GROUP

ALWAYS INSTALL SAFETY CABLES

WARNING: Mounting and/or suspension of equipment requires experienced professionals. Improperly installed equipment can result in property damage, personal injury and/or liability to the installing contractor.

MM-060

80 lb. WLL

PAN & TILT BOTTOM & REAR SPEAKER MOUNT

MULTIMOUNT®

DIMENSIONS:

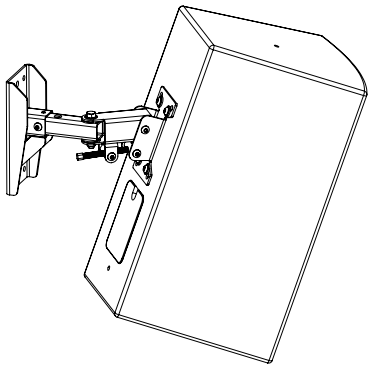

Rear Mount
R-Position

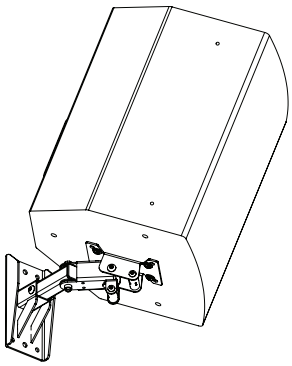

Bottom Mount
B Position

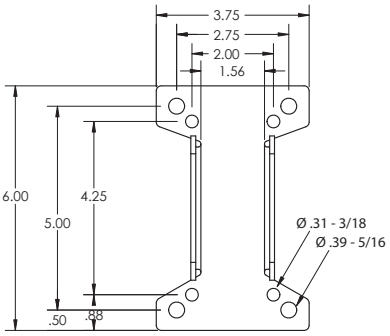

Speaker
Adapter Bracket

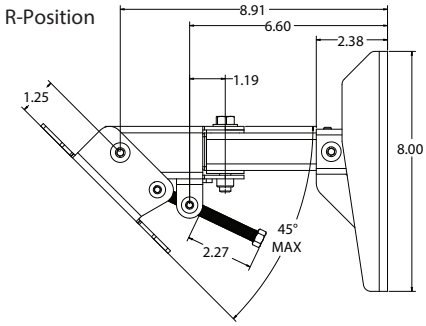

45 degrees Max Down Tilt
Rear Mounted

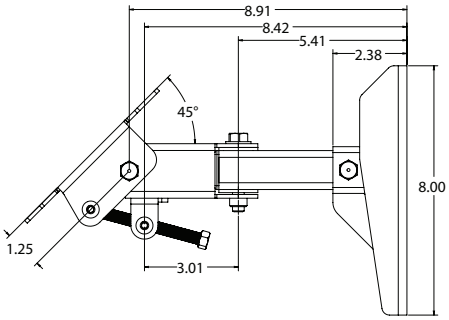

45 degrees Max Up Tilt
Bottom Mounted



Wall Mount Bracket

OPTIONAL ACCESSORIES

Wall Stud Plate
WP-16



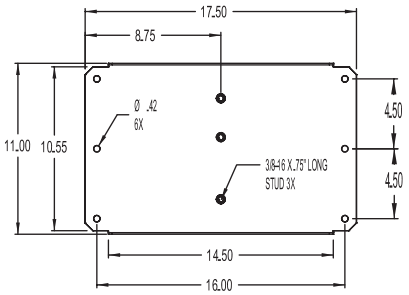

Front View

11" Extension Arm
MM-060-EXT-11

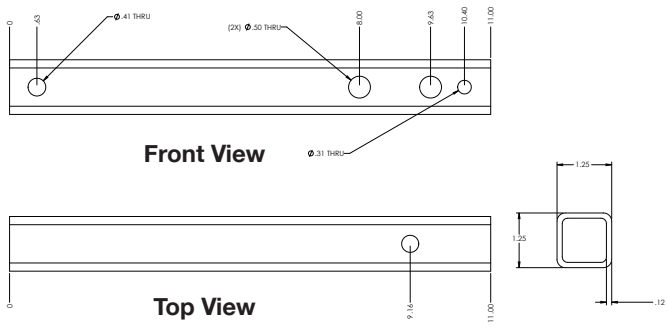

Adaptive Technologies Group
1635 E. Burnett Street | Signal Hill, CA 90755 USA
Ph: 562.424.1100 | Fax: 562.424.3520
www.adaptivetechnologiesgroup.com

ADAPTIVE TECHNOLOGIES GROUP

ALWAYS INSTALL SAFETY CABLES

WARNING: Mounting and/or suspension of audio and video equipment requires experienced professionals. Improperly installed loudspeakers can result in property damage, personal injury and/or liability to the installing contractor.

MADE IN USA

Rated for outdoor use.