

TCK-022-S

22" Fixed Cable Length

ADJUSTABLE TILT CABLE KIT VERTICAL ORIENTATION

TILT CABLE KIT



QUICK ADJUST PULLBACK SYSTEM

Steerables® Tilt Cable Kits are a general purpose, time saving and complete loudspeaker suspension and aiming solution. This versatile aircraft cable and pulley design allows installers to secure loudspeakers from an overhead grid structure or other suspension device, then quickly and precisely tilt them into position using the adjustable pull back feature (see Wall and ceiling Steerables®, GridLink™ data sheets).

The Steerables® Tilt Cable Kit provides a simple method of suspending and aiming loudspeakers, offering unprecedented ease of installation and aiming. Loudspeakers and other objects can be suspended to the top of the cabinet to achieve just slight down tilt angles or be suspended from the back of the cabinet to achieve a steeper down tilt angle (See illustrations below).

STANDARD FEATURES:

- ▶ Infinite tilt and locking adjustment
- ▶ Available in black or silver finish
- ▶ Standard and custom assemblies
- ▶ Close factory cable length tolerances

To select the proper length tilt cable kit yourself, use the pattern maker and cable kit selector templates found here:
www.adapttechgroup.com/pdf/tilt-cable-calculator.pdf

SPECIFICATIONS:

Materials: See "Package Contents"

Color: Silver

Design Factor: 10:1 ratio*

Pack Count: 1 set/package

Fixed Cable Length: 22" Fixed cable kit

*Clutch lock design factor = 5:1


** 4-Point suspension requires additional pair of fixed length cables

WLL = Working Load Limit

PACKAGE CONTENTS & WORKING LOAD:

QTY.	DESCRIPTION	WLL (lbs/Kg)
2 pcs	3/16" dia. Fixed cable	420/191
1 pc	1/8" dia. Pull back cable	200/91
5 pcs	Anchor shackles	600/272
1 pc	Clutch lock assembly	220/100*
1 pc	Pulley assembly	210/95
5 pcs	Cable tie wrap	N/A

DIMENSIONS:

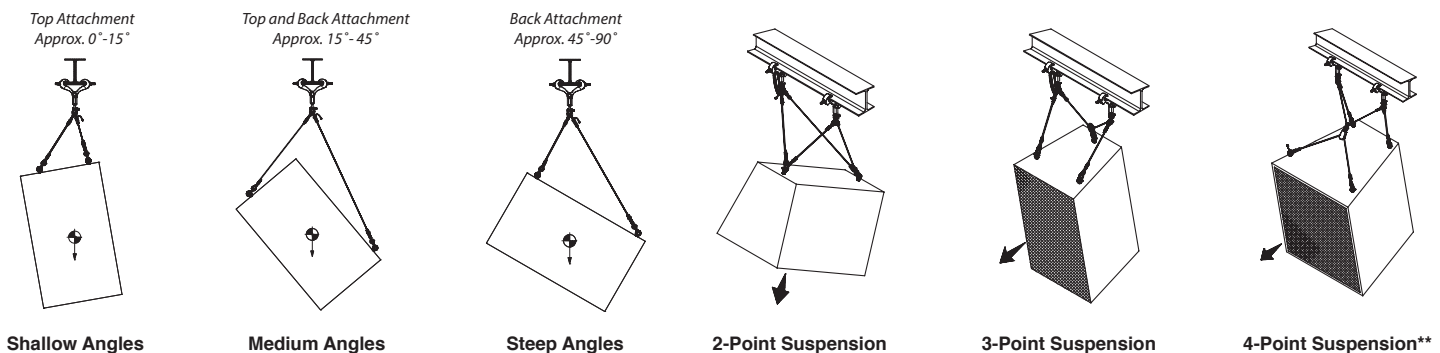

ALWAYS INSTALL SAFETY CABLES

WARNING: Mounting and/or suspension of audio and video equipment requires experienced professionals. Improperly installed loudspeakers can result in property damage, personal injury and/or liability to the installing contractor.