


3/16" Wire Rope Sling

3/16" DIAMETER 7X19 GAC

WIRE ROPES



ATM Fly-Ware maintains a comprehensive inventory of standard length wire rope slings and in a variety of diameters to accommodate various working load requirements. They are produced domestically and load rated to assure safe and predictable installations. Wire rope assemblies are the most economical way to span and bridle from overhead structures and, because they are produced in the factory, their length tolerance accuracy and integrity far exceeds those produced in the field.

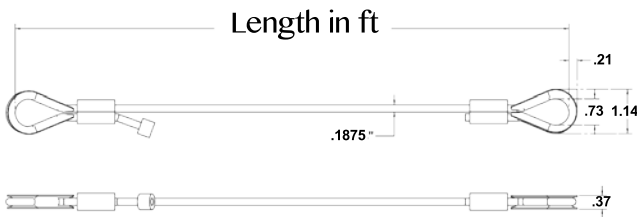

SPECIFICATIONS:

Diameter: 3/16" .1875 / 4.8mm

Design Factor: 5:1

WLL: (See Table)

SINGLE WIRE ROPE ASSEMBLIES

Part Number	Length in feet	Material	Color	WLL
3/16X1	12"	STEEL	SILVER	840 lb / 382 Kg
3/16X1-B	12"	STAINLESS	BLACK	740 lb / 336 Kg
3/16X2.5	30"	STEEL	SILVER	840 lb / 382 Kg
3/16X2.5-B	30"	STAINLESS	BLACK	740 lb / 336 Kg
3/16X5	60"	STEEL	SILVER	840 lb / 382 Kg
3/16X5-B	60"	STAINLESS	BLACK	740 lb / 336 Kg
3/16X10	120"	STEEL	SILVER	840 lb / 382 Kg
3/16X10-B	120"	STAINLESS	BLACK	740 lb / 336 Kg
3/16X20	240"	STEEL	SILVER	840 lb / 382 Kg
3/16X20-B	240"	STAINLESS	BLACK	740 lb / 336 Kg
3/16X30	360"	STEEL	SILVER	840 lb / 382 Kg
3/16X30-B	360"	STAINLESS	BLACK	740 lb / 336 Kg
3/16X40	480"	STEEL	SILVER	840 lb / 382 Kg
3/16X40-B	480"	STAINLESS	BLACK	740 lb / 336 Kg
3/16X50	600"	STEEL	SILVER	840 lb / 382 Kg
3/16X50-B	600"	STAINLESS	BLACK	740 lb / 336 Kg



Rated for indoor use.

ALWAYS INSTALL SAFETY CABLES

WARNING: Mounting and/or suspension of audio and video equipment requires experienced professionals. Improperly installed loudspeakers can result in property damage, personal injury and/or liability to the installing contractor.